


Contratuercas metálicas EMC

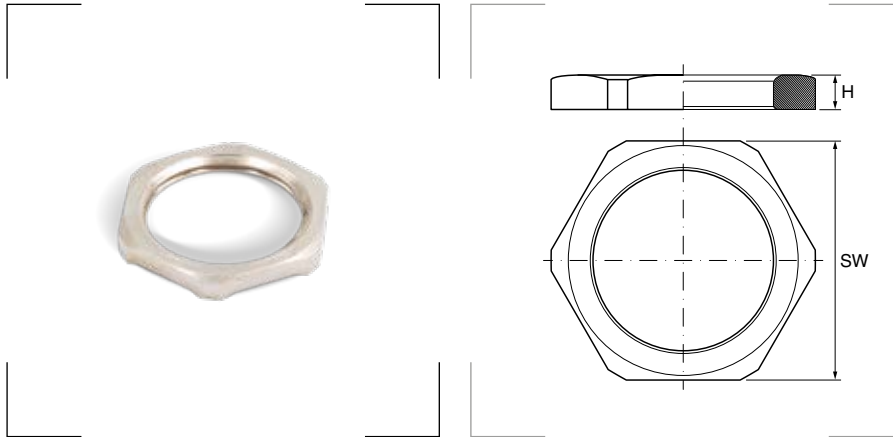

Materiales

Latón niquelado.

Certificados y normas aplicables



EN 60423
DIN 40430

Descripción

Contratuercas metálicas EMC con cantos cortantes.

Rosca métrica

Referencia	Métrica EN 60423	SW mm	H mm	Embalaje unidades
520.15.20	M 12 x 1,5	15	3,3	100
520.17.20	M 16 x 1,5	19	3,5	100
520.20.20	M 20 x 1,5	24	3,5	100
520.25.20	M 25 x 1,5	30	3,5	100
520.32.20	M 32 x 1,5	36	4,0	100
520.40.20	M 40 x 1,5	46	4,6	25
520.50.20	M 50 x 1,5	60	5,6	10
520.63.20	M 63 x 1,5	70	6,7	10

Rosca PG

Referencia	PG DIN 40430	SW mm	H mm	Embalaje unidades
520.07.20	PG 7	15	3,3	100
520.09.20	PG 9	18	3,3	100
520.11.20	PG 11	21	3,5	100
520.13.20	PG 13,5	23	3,5	100
520.16.20	PG 16	26	3,5	100
520.21.20	PG 21	32	4,0	100
520.29.20	PG 29	41	4,6	100
520.36.20	PG 36	51	5,6	25
520.42.20	PG 42	60	5,6	10
520.48.20	PG 48	64	6,1	10