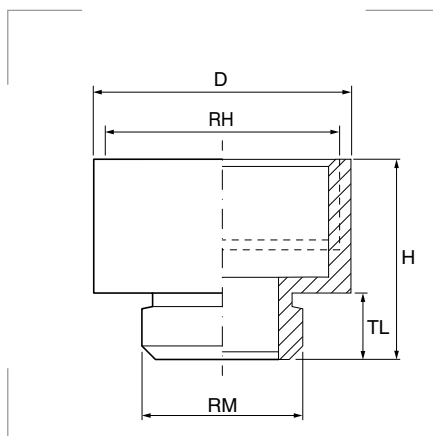


Ampliaciones metálicas


Materiales

Latón niquelado.

Certificados y normas aplicables

 EN 60423
 DIN 40430

Rosca métrica

Referencia	Rosca macho	Rosca hembra	D Ø mm	H mm	TL mm	Embalaje unidades
731.1216.0	M 12 x 1,5	M 16 x 1,5	18	15,5	5	100
731.1620.0	M 16 x 1,5	M 20 x 1,5	22	17,5	5	100
731.2025.0	M 20 x 1,5	M 25 x 1,5	27	20,0	6	50
731.2532.0	M 25 x 1,5	M 32 x 1,5	34	22,5	7	50
731.2540.0	M 25 x 1,5	M 40 x 1,5	42	23,5	7	50
731.3240.0	M 32 x 1,5	M 40 x 1,5	42	24,5	8	50
731.3250.0	M 32 x 1,5	M 50 x 1,5	52	27,5	8	25
731.4050.0	M 40 x 1,5	M 50 x 1,5	52	27,5	8	25
731.5063.0	M 50 x 1,5	M 63 x 1,5	66	31,0	9	10

Rosca PG

Referencia	Rosca macho	Rosca hembra	D Ø mm	H mm	TL mm	Embalaje unidades
730.0709.0	PG 7	PG 9	17	15,0	5,0	100
730.0911.0	PG 9	PG 11	20	16,5	6,0	100
730.0913.0	PG 9	PG 13,5	22	17,5	6,0	100
730.1113.0	PG 11	PG 13,5	22	17,5	6,0	100
730.1116.0	PG 11	PG 16	24	18,5	6,0	50
730.1316.0	PG 13,5	PG 16	24	19,0	6,5	50
730.1321.0	PG 13,5	PG 21	30	21,0	6,5	50
730.1621.0	PG 16	PG 21	30	21,0	6,5	25
730.2129.0	PG 21	PG 29	39	23,0	7,0	100
730.2936.0	PG 29	PG 36	50	27,5	8,0	50
730.3642.0	PG 36	PG 42	57	31,0	9,0	25
730.4248.0	PG 42	PG 48	64	33,0	10,0	10