
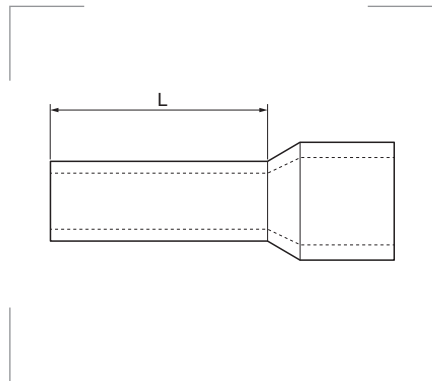


Punteras aisladas de punta hueca – SISTEMA TE

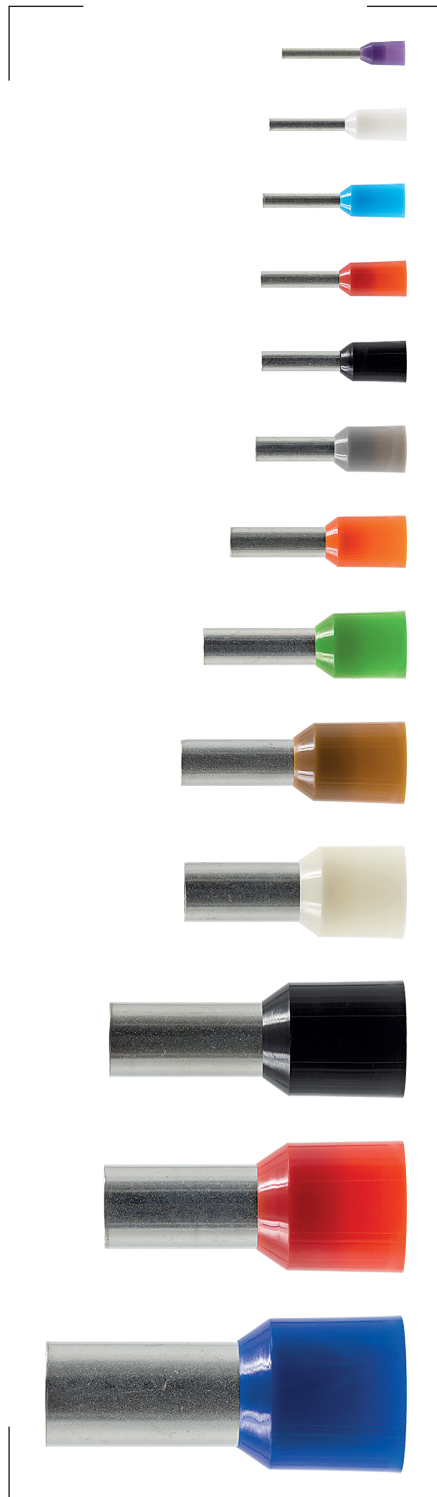

Materiales

Poliamida 6.6 norma DIN 46228/4.

Certificados y normas aplicables



Temperatura de trabajo

-40°C a 105°C.

Referencia	Color	Sección mm ²	L mm	Embalaje unidades
TE-0,25	■	0,25	8	500
TE-0,25C			8	100
TE-0,50	□	0,50	8	500
TE-0,50C			8	100
TE-0,50-L			10	500
TE-0,50-LC			10	100
TE-0,75	■	0,75	8	500
TE-0,75C			8	100
TE-0,75-L			12	500
TE-0,75-LC			12	100
TE-1	■	1,00	8	500
TE-1C			8	100
TE-1-L			12	500
TE-1-LC			12	100
TE-1,50	■	1,50	8	500
TE-1,50C			8	100
TE-1,50-L			18	500
TE-1,50-LC			18	100
TE-2,50	■	2,50	8	500
TE-2,50C			8	100
TE-2,50-L			18	500
TE-2,50-LC			18	100
TE-4	■	4,00	10	200
TE-4C			10	100
TE-4-L			18	200
TE-4-LC			18	100
TE-6	■	6,00	12	100
TE-6-L			18	100
TE-10	■	10,00	12	100
TE-10-L			18	100
TE-16	■	16,00	12	100
TE-16-L			18	100
TE-25	■	25,00	16	100
TE-25-L			22	100
TE-35	■	35,00	16	100
TE-35-L			22	100
TE-50	■	50,00	20	100
TE-50-L			22	100